



Trademark of The J D Russell Company

SPECIFICATIONS

HEAVY-DUTY GALVANIZED STEEL

All hot-dipped galvanized steel edging, shall meet ASTM Specification A123/A123M-97A

1/8"

(.12-.125")

Versatile, lightweight commercial edging with a 2.6 mil (1.5 oz/sft) zinc coating. Providing economical durability and uniformity to flower beds and ground cover separation.

3/16"

(.182-.188")


General purpose commercial edging with a 3.0 mil (1.7 oz/sft) zinc coating. Commonly used in walkways, driveways and perimeter strips providing strength and continuity to all landscape designs.

1/4"

(.20-.25")

Heavy-duty edging with a 3.3 mil (2.0 oz/sft) zinc coating, for use where straight lines are essential. Ideal for rock and gravel retention on pathways and where erosion control of blacktop driveways and parking lots is required.

SPECIFICATION INSERT

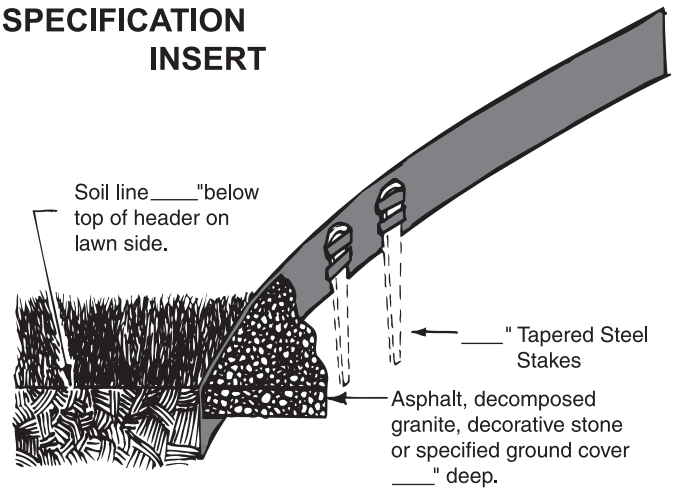

GALVANIZED STEEL HEADER DETAIL

All steel curbing shall be ___ thick x ___ deep with ___ stakes per section, hot-dipped galvanized as manufactured by **The J D Russell Company** and under its tradename, **DURAEDGE**

WARRANTY: We warrant our materials to be of good quality and will replace materials found defective, providing however, that the buyer shall examine the materials when received and promptly notify us of any defect before the materials are used or incorporated into a structure for which they are intended. Unless otherwise agreed to in writing, this warranty shall extend only to comply with specifications of materials manufactured by and published by The J D Russell Company and made available to the buyer at request. We cannot warrant nor in any way guarantee particular methods, use or applications and performance, nor can we warrant that the materials will be suitable for any intended use. This warranty is in lieu of all others expressed or implied and may not be extended by representatives, written sales information or drawings, nor do our distributors or salespersons or any representative of distributors or of this company have any authority to extend any guarantee beyond that outlined above or to waive the limitations of the seller's liability.

SIZE	1/8"	3/16"	1/4"
DEPTH	4"	4"	5"
LENGTH	16'	16'	16'
ACTUAL COVERAGE	15'-4"	15'-4"	15'-4"
NUMBER OF STAKES (per piece) 16FT	6	6	7
STAKE DEPTH	16"	16"	16"
APPROX. WEIGHT (lbs) (including stakes)	2.0/ft	3.0/ft	4.7/ft

MANUFACTURED by



THE J D RUSSELL COMPANY

NORTHERN REGION

(800) 888-9708

(586) 254-8500

FAX (586) 254-8555

SOUTHERN REGION

(800) 888-6872

(270) 826-7008

FAX (270) 826-7018

WESTERN REGION

(800) 888-7425

(520) 742-6194

FAX (520) 293-2202

Visit our website at <http://www.jdrussellco.com>
or E-mail us at jdr4@mindspring.com