

ALUMINUM FORM TIES



ALUMINUM FORM TIES

Aluminum form ties secure aluminum forms in order to pour the desired wall thickness. These ties are used predominantly for poured wall basement foundations around the country. Ties feature easy-break notches that break horizontally flush with the wall. Location notches allow placement of reinforcing steel. Available in full or nominal sizes from 6-12 inches. Sold 100 per bundle.

- Available in both Full & Nominal sizes.
- Designed for easy break off.
- 3,600 safe work load with a 2:1 safety factor.
- Made from high strength steel to ensure consistent quality.
- Ties are compatible with all major aluminum forming systems in the industry.

SAFETY TESTING




- Our form ties are pull tested to a minimum of 7,500 load pounds
- All ties are tested prior to shipping
- Test results available upon request
- Made from 14 ga. full hard cold rolled steel.



PROUDLY MADE
IN THE USA

DIMENSIONS

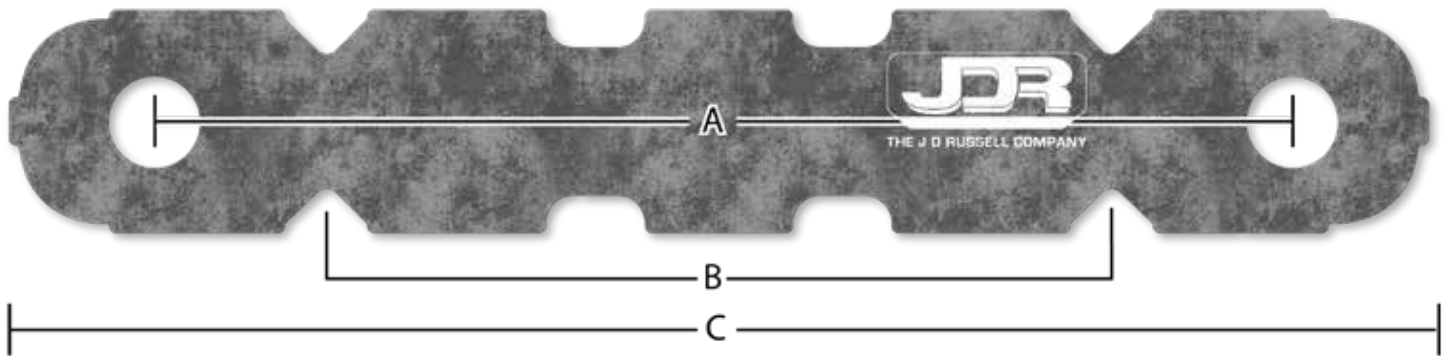

6" NOMINAL	8" NOMINAL	10" NOMINAL	12" NOMINAL
A= 7.75"	A= 9.75"	A= 11.75"	A= 13.75"
B= 5.3125"	B= 7.3125"	B= 9.3125"	B= 11.3125"
C= 9.625"	C= 11.625"	C= 13.625"	C= 15.625"
D= 1.5"	D= 1.5"	D= 1.5"	D= 1.5"

6" FULL	8" FULL	10" FULL	12" FULL
A= 8.125"	A= 10.125"	A= 12.125"	A= 14.125"
B= 5.6875"	B= 7.6875"	B= 9.6875"	B= 11.6875"
C= 10.015"	C= 12.015"	C= 14.015"	C= 16.015"
D= 1.5"	D= 1.5"	D= 1.5"	D= 1.5"